



KHOSLA
listen innovate deliver

Reampack 21



A4/F.S. Copier Paper Automatic
Servo Controlled Ream Packing Machine



Reampack 21

PRINCIPLE OF OPERATION

A revolutionary machine from the house of Khosla with a unique link-up technology that connects to any paper cutting and stacking machine in paper mills and converter units. Bringing new technology to the table is Khosla Machines Pvt. Ltd. (established in 1983) with 20 patents, ISO 9001 and CRISIL certification to its credit.

EXCLUSIVE FEATURES

- PLC Controls for easy change over
- High quality packing
- 5-axes servo controls
- Saves wastage with No - ream - No - Wrapper Interlock
- No- Ream-No-Wrapper Interlock
- Nordson Hot-melt applicator unit to program gluing spot. Optimised gluing guns for accurate glue application
- Accurate servo controlled eye-mark registration
- Heavy cast iron structure
- Safety guarding
- Overhead transfer system to eliminate packet-push-packet
- Extended side belt discharge conveyor for proper side sealing



Presenting
Reampack 21 with



ease | efficiency | eliminating waste

Highlights

- Easy integration with new / existing sheeting machines
- Equivalent to the efficiency of 54 people in 3 shift operations
- Extremely gentle handling of product
- High speeds
- High quality packing
- Easy and quick size change for ream height and A4 / fullscape (FS)
- Low noise
- Saves up to 60 mm length of wrapper paper per ream
- CE compliant safety guarding
- Servo controls
- Imported instrumentation
- Low voltage controls and heaters for operator's safety
- Saves labour cost to a great extent

SPECIFICATIONS

PRODUCT SIZE (all dimensions in mm)

L MAX 420	W MAX 300	H MAX 65
L MIN 200	W MIN 200	H MIN 30

other dimensions may be considered on request
combination of max. sizes may be out of the range of specifications

WRAPPING MATERIAL

WRAPPER : PAPER / POLY LAMINATION
MAX DIA 680mm CORE DIA 80mm

SPEED UPTO 50 PPM INFINITELY VARIABLE

MACHINE WEIGHT 2500 Kgs. APPROX.

ELECTRICAL


SUPPLY VOLTAGE 3 PHASE 220V, 50 Hz
CONTROL VOLTAGE 24V DC
MOTOR 2HP 3 PHASE
SIX AXES SERVO CONTROL

Electric power: 11kW at 3 phase 230 VAC
(inclusive of hot melt applicator)
AIR CONSUMPTION: 90 LPM at 5 bars


OPTIONS :

- Flexible infeed conveyor to suit plant layout
- Flexible linkup conveyor to suit plant layout
- Conversion parts for size change

WIDTH WISE SOAP PACK SAMPLES

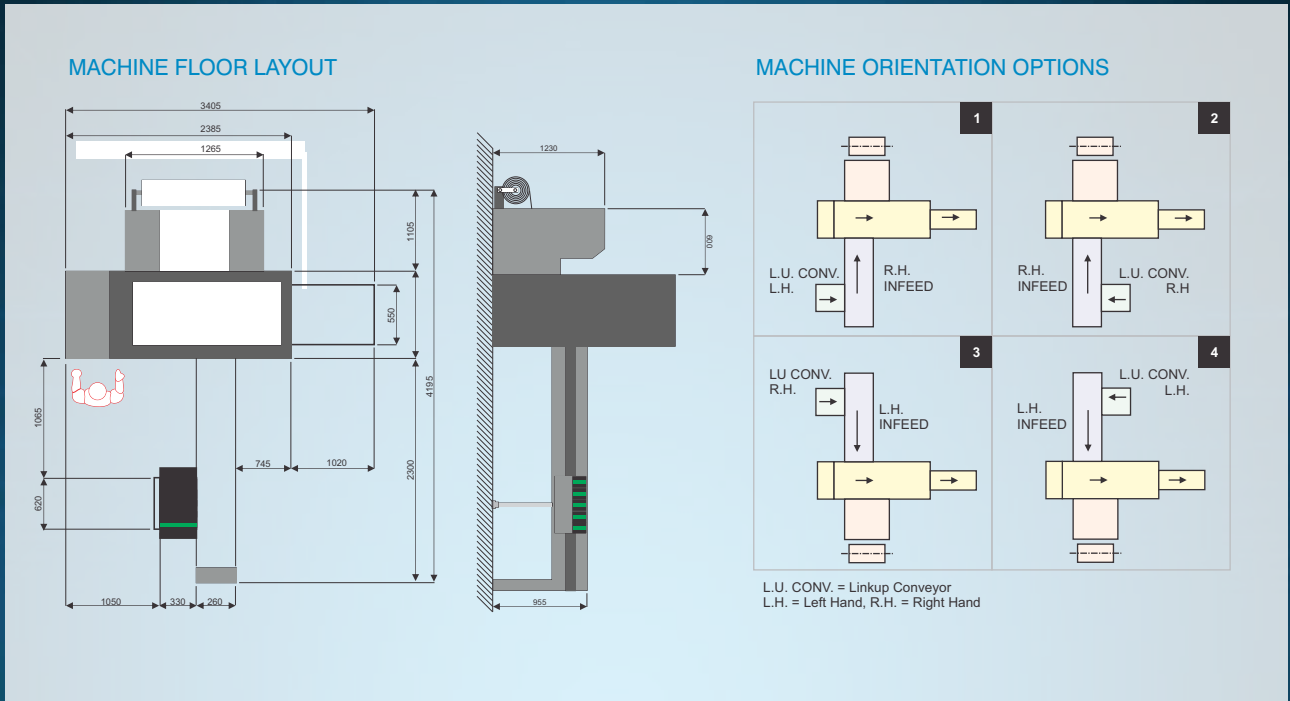

PRODUCT SAMPLE

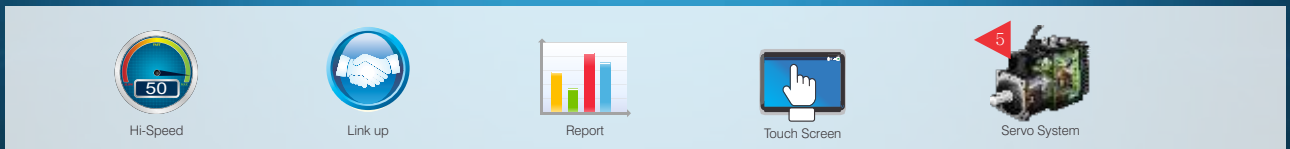

KHOSLA MACHINES PVT. LTD.
 B-17, Industrial Area, Phase-2, Mohali - 160 051, Punjab INDIA
 Tel : +91 172 2225587, 2227324
 Fax : +91 172 2271146 | E-mail: info@khoslamachines.com

Technical specifications may vary because of continuous development