


WRAPPER 4000T

SPECIAL FEATURES

- High speed
- Low and easy maintenance
- Link ability
- High productivity
- PLC / Servo system

OPTIONS

- Packing date printer
- Flexible infeed conveyor to suit plant layout
- Conversion parts for size change
- Collator for easy handling of soap

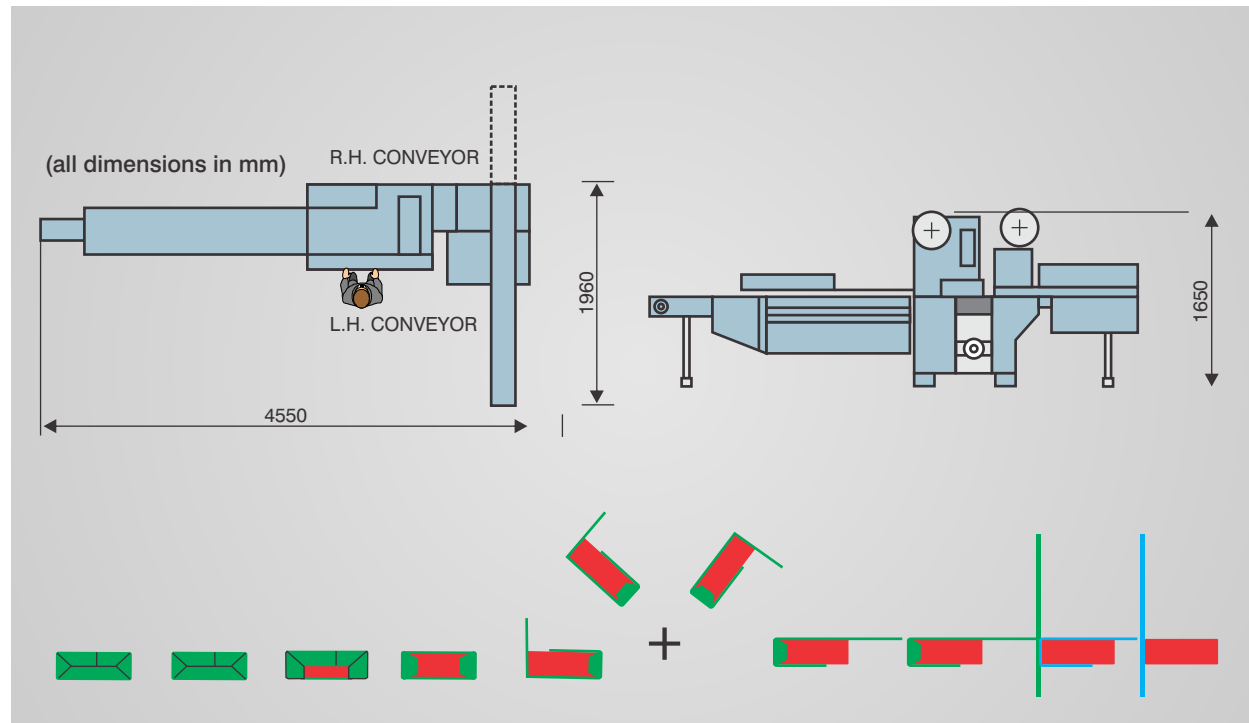

SPECIFICATIONS

PRODUCT SIZE (all dimensions in mm)

L max 175 W max 65 H max 40
 L min 65 W min 35 H min 13
 other dimensions may be considered on request combination
 of max. sizes may be out of the range of specification

WRAPPER

Max Dia 400mm Core Dia 70mm
 Material : PAPER/POLY/HOTMELT LAMINATION

ELECTRICAL

Supply Voltage : 3 Phase 220V, 50HZ
 Motor : 2HP, 3 Phase
 Heater Power : 3.3 KW

Machine Speed Upto 180 PPM
 Infinitely Variable
 Machine Weight : 1200 Kgs. approx.



Hi-Speed



Link up



Servo System



KHOSLA MACHINES PVT. LTD.
 B-17, Industrial Area, Phase-2,
 Mohali 160 051, Punjab, INDIA.


TEL : 91+172+2225587, 91+172+2227324
 FAX : 91+172+2271146
 Website : www.khoslamachines.com
 E-mail : info@khoslamachines.com

Technical specifications may vary because of continuous development

buzztime.com




KHOSLA
 listen innovate deliver

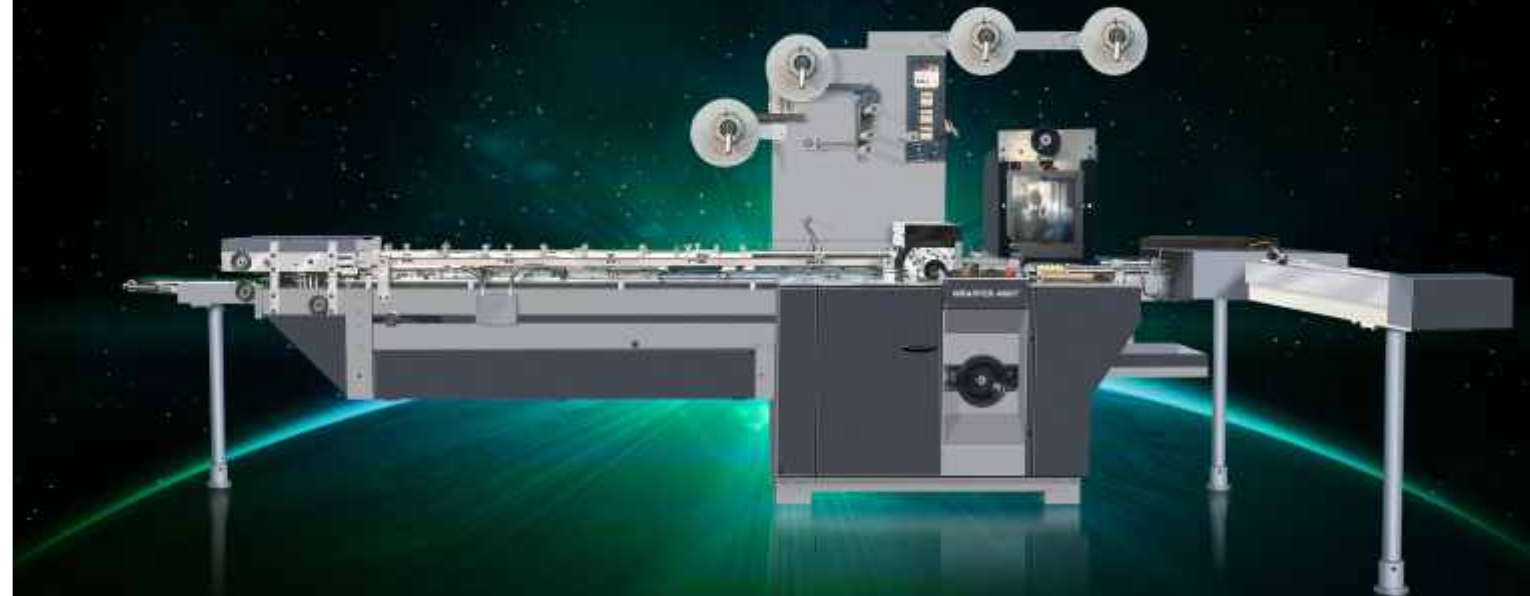

WRAPPER 4000T

TOILET SOAP WRAPPING MACHINE



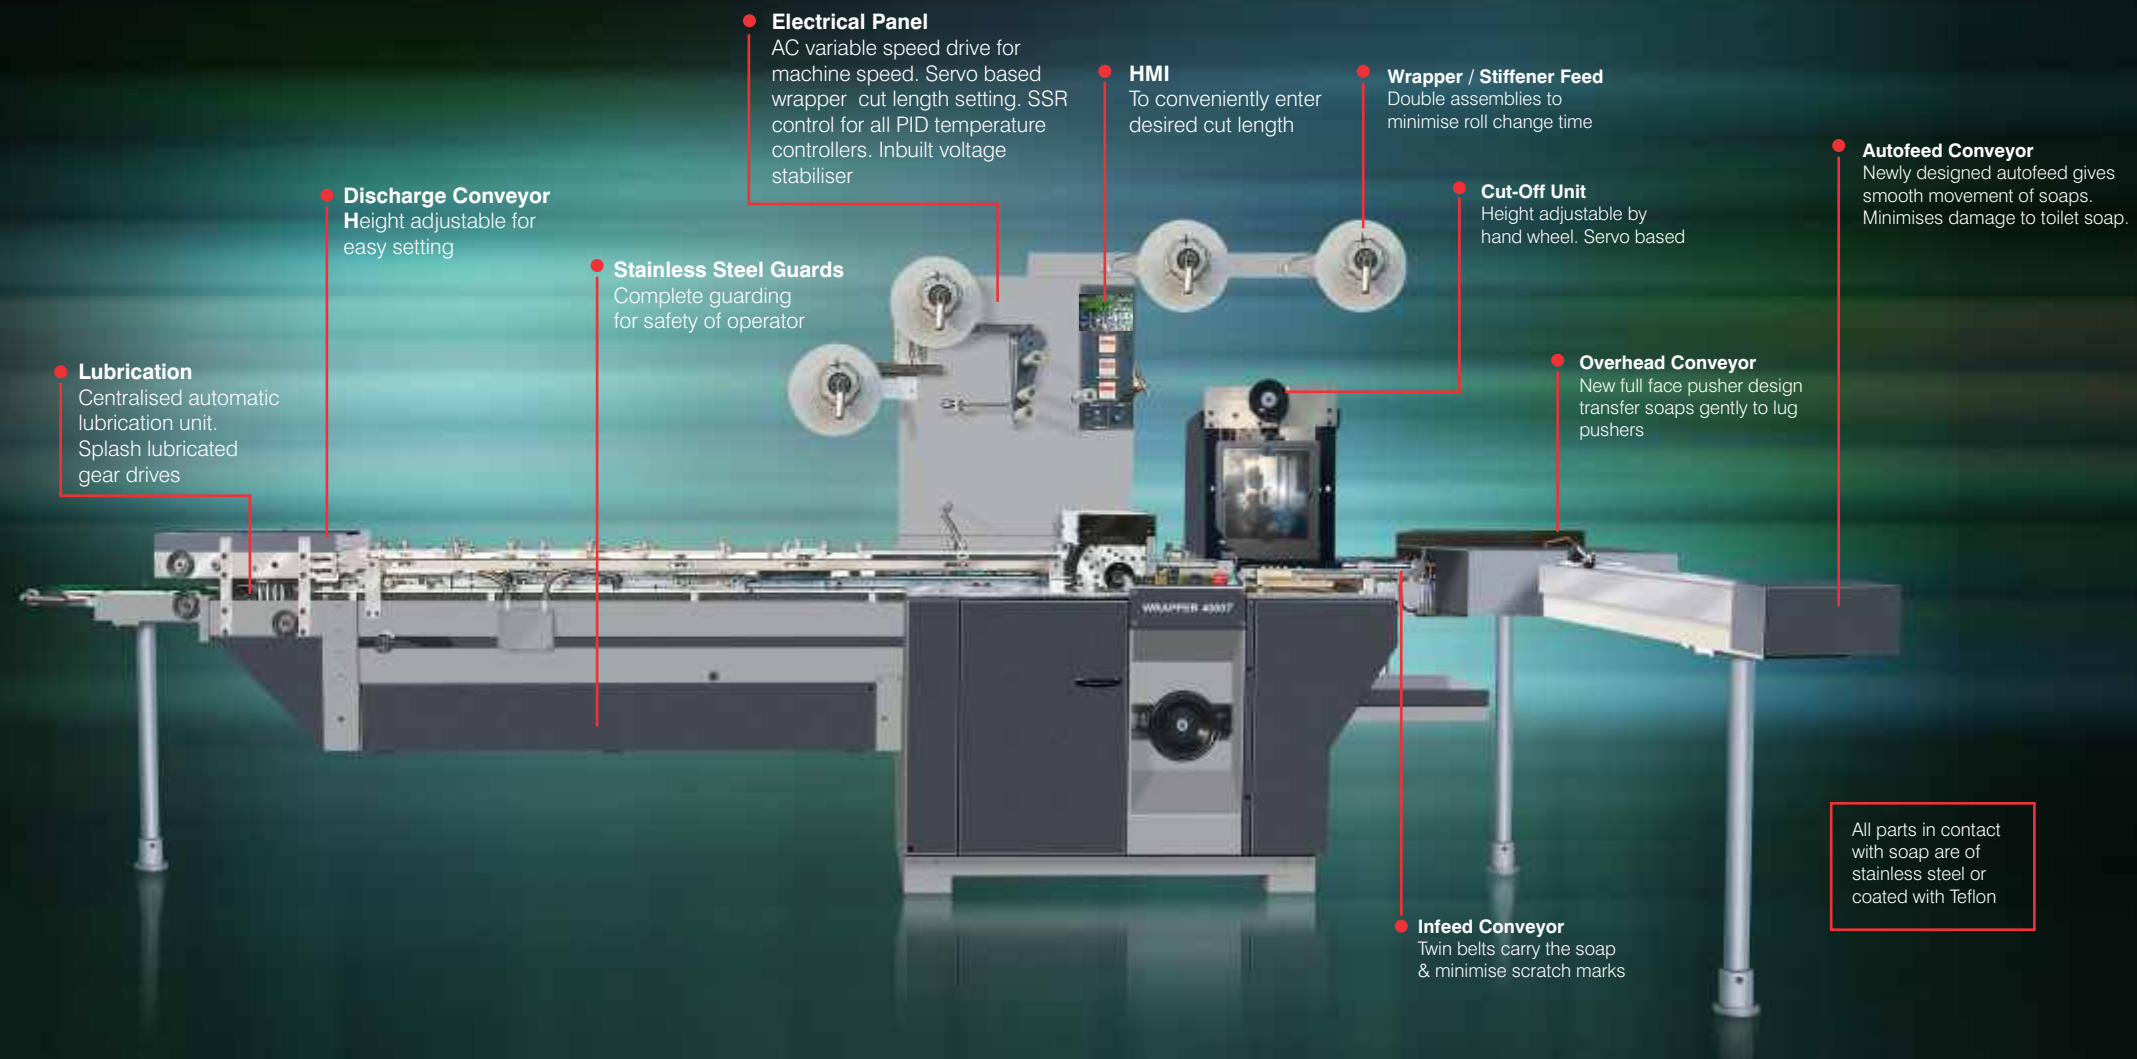

STANDARD FEATURES

- High speed operation of upto 180 tablets per minute
- The new design Autofeed Conveyor provides attention free linking with the cutting machine / stamping machine to match the speed of production
- Excellent quality of soap handling, even for soft soap
- Timing belts (80%) allow maintenance free operation for long periods
- Automatic centralised lubrication
- Double spool holder to save reel change over time, integrated with “wrapper-break-machine-stop” interlock
- PLC / Servo system for wrapper cut length
- Height adjustable cut off unit
- Simple to maintain “no-packet-no-wrap” interlock
- Long top and side heaters with Cooling Plates for reliable sealing at high speed
- Digital temperature controllers for all heaters (separate front and rear side heaters)
- Stainless steel guards
- All parts in contact with soap are either stainless steel or coated with Teflon. Conveyor belt is of food grade quality
- Height adjustable discharge conveyor



OUR OTHER MACHINES FOR SOAP WRAPPING

- LOGIPAC 22S, Flow Wrap Machine for Soap
- WRAPPER 6000T, Servo Based, High Speed Toilet Soap Wrapping Machine
- WRAPPER 6000D, Servo Based, High Speed Detergent Bar Wrapping Machine
- WRAPPING 4000, Detergent Bar Wrapping Machine
- ABM 1100, Automatic Banding Machine for Soap
- FINSEAL 11MP, Pouch Pack Machine for Soap in 2x2 or 2x3 collation

